


RenderMan Preferences

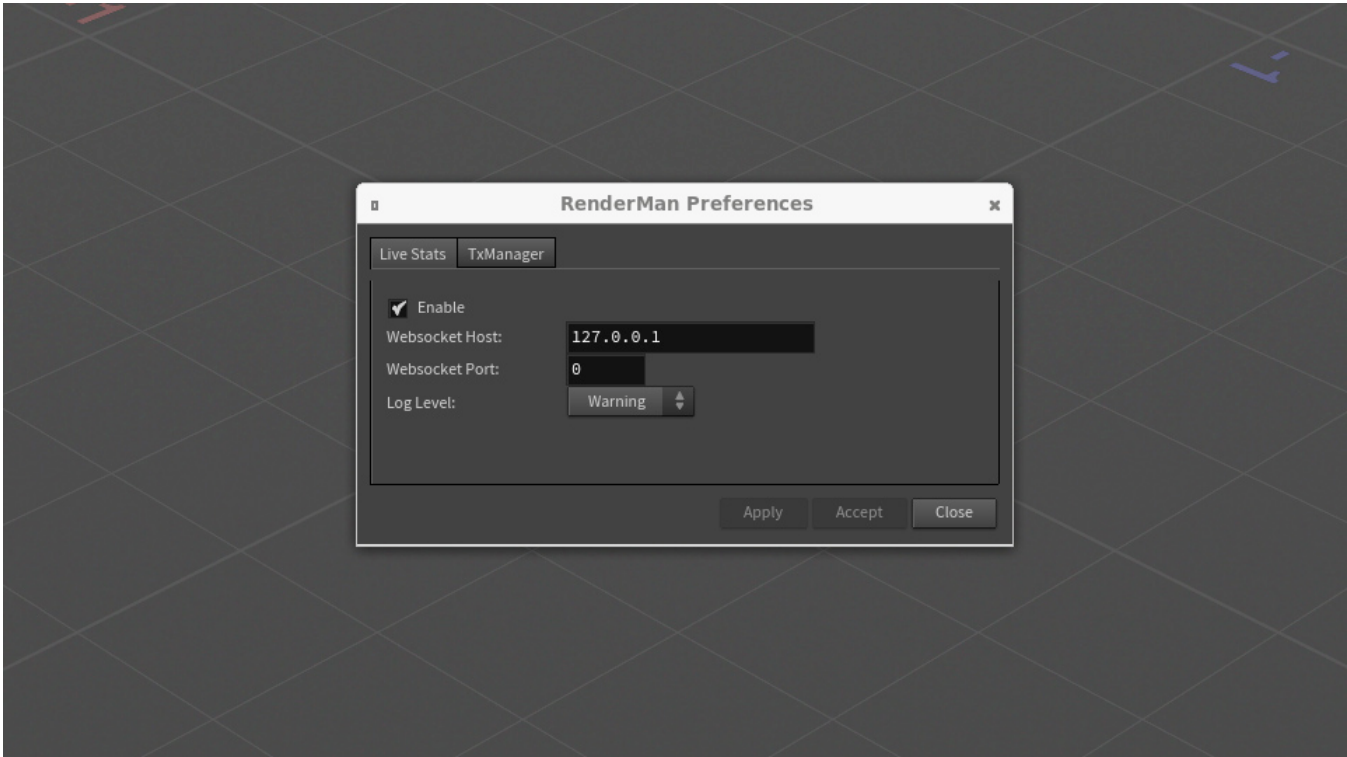

A number of RenderMan-specific preferences can be set via the Preferences option found under the RenderMan menu.

Live Stats

Enable

Enables the Live Stats server.

Websocket Host

Host used by the server

Websocket Port

Port used by the server

Log Level

Changes the verbosity level of the stats system

TxManager

Fallback path

By default, the .tex file will be written in the same directory as the source image file. If this directory is not writable, the texture manager will write to the fallback directory instead.

Tex Extension

The texture manager will not convert any file with one of these extensions and will be used as-is. Entries should be space-delimited

Workers

The number of txmake processes to launch in parallel. The default is 2 (assuming you have a typical 4-core machine). You can increase this number only if you have more than 8 physical cores.

Always Fallback

If this is on, we will only use the directory specified in the Fallback path option.

Keep extension

If on, keep the original extension of the input image

Show Advanced

If on, show advanced settings in the Texture Manager panel.